


# 336.4 - 636 AAC SERIES TAP CONNECTORS

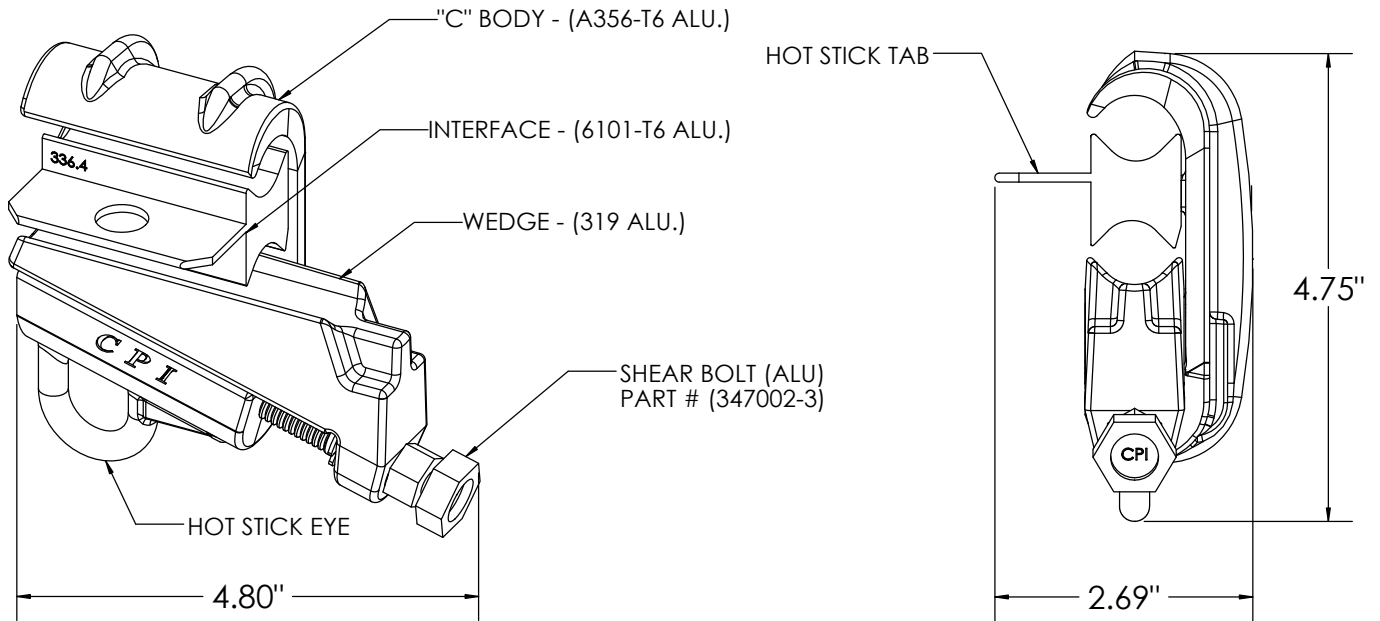

Main Conductor		Tap Conductor		Catalog #
Description	Dia. Range	Description	Dia. Range	
336.4 350 MCM 397 ACSR 18/1	.666" - .743"	#6, #4	.162" - .257"	<b>336200</b>
		#4 ACSR, #2, 1/0 AAC	.257" - .368"	<b>336104</b>
		1/0, 2/0, 3/0	.368" - .502"	<b>336012</b>
		4/0 ACSR, 266.8 AAC	.522" - .592"	<b>336866</b>
		266.8 ACSR 36/7, 336.4, 397.5	.642" - .806"	<b>336718</b>
397 ACSR 24/7 450 MCM 477 500 MCM 556.5 AAC	.769" - .858"	#6 AAC, #4, #2	.184" - .316"	<b>477057</b>
		#2, 1/0	.292" - .398"	<b>477962</b>
		1/0 ACSR, 2/0, 3/0 AAC	.398" - .464"	<b>477853</b>
		3/0 ACSR, 4/0, 250, 266.8, 300 AAC	.502" - .628"	<b>477724</b>
		266.8 ACSR 36/7, 300 AAC, 336.4, 397.5 ACSR 24/7	.628" - .772"	<b>477633</b>
		336.4 ACSR 26/7, 397, 477, 500 MCM, 556 AAC	.720" - .858"	<b>477434</b>
477 ACSR 26/7 556 600 MCM 636 ACSR 18/1 605 ACSR	.856" - .953"	#6, #4, #2	.162" - .316"	<b>556956</b>
		#2, #1, 1/0	.292" - .398"	<b>556892</b>
		1/0, 2/0, 3/0, 4/0 AAC	.368" - .522"	<b>556783</b>
		4/0, 250, 266.8, 300 MCM, 336 AAC, 350 MCM	.522" - .680"	<b>556638</b>
		350 MCM, 336.4, 397.5, 477 AAC	.680" - .806"	<b>556504</b>
		397 ACSR 30/7, 477, 500 MCM, 556.5, 636 AAC	.795" - .918"	<b>556294</b>
		556.5 ACSR 24/7, 636 AAC, 636 ACSR 18/1, 605	.914" - .952"	<b>556294-1</b>

**STANDARD PACKAGE:** Full Carton: 25 Units: 11" x 11" x 11.5" Box: 32 Lbs. Half Carton: 15 Units: 11" x 11" x 7" Box: 20 Lbs.