


# #4 - 350 SERIES STIRRUP CONNECTORS

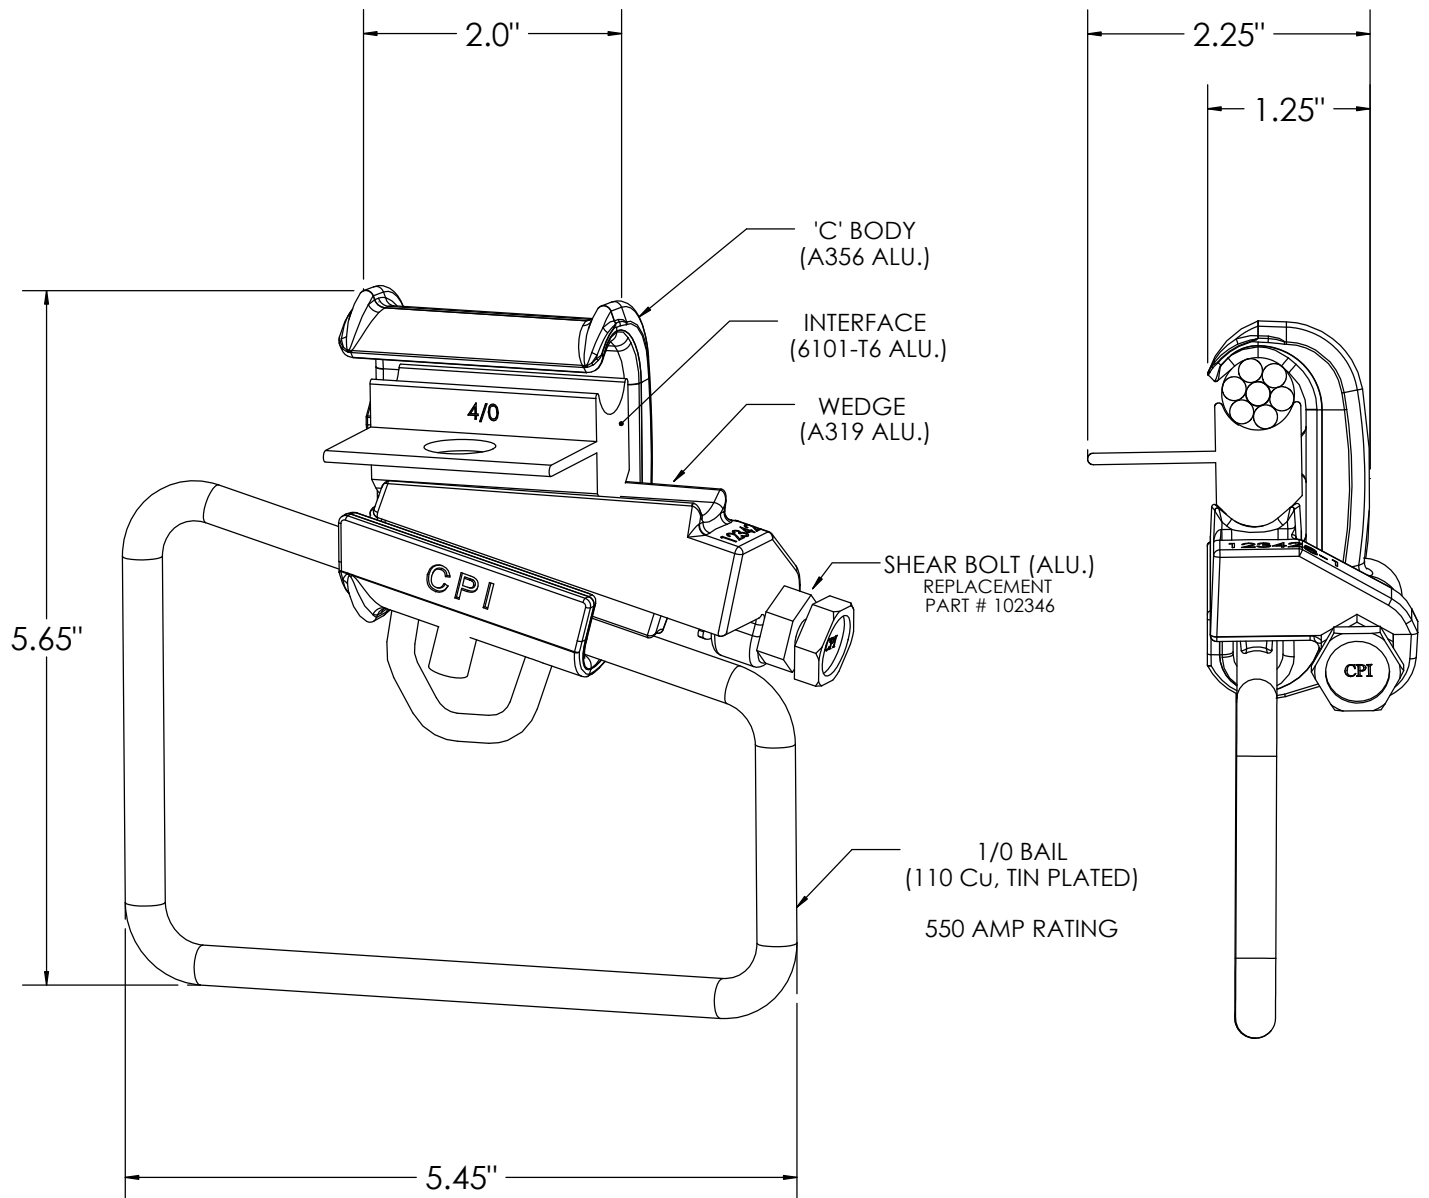

1/0 Copper Bails are rated for 550 Amps

Main Conductor		Bail Size	Catalog #
Description	Dia. Range		
#6, #4, #2 AAC	.162" - .292"	1/0	<b>102011</b>
#2, #1, 1/0	.292" - .398"	1/0	<b>102010</b>
2/0, 3/0, 4/0 AAC	.414" - .522"	1/0	<b>102009</b>
3/0 ACSR, 250, 4/0	.502" - .574"	1/0	<b>264124</b>
266.8, 300, 336.4, 397.5 AAC	.586" - .724"	1/0	<b>336915-1</b>

STANDARD PACKAGE: 25 UNITS 11"X 11" X 7" BOX 25 Lbs. per BOX